



A K-Band Linear Phased Array Antenna Based On $\text{Ba}_{0.60}\text{Sr}_{0.40}\text{TiO}_3$ Thin Film Phase Shifters

R. Romanofsky
Glenn Research Center, Cleveland, Ohio

J. Bernhard
University of Illinois, Urbana, Illinois

G. Washington
Ohio State University, Columbus, Ohio

F. VanKeuls
Ohio Aerospace Institute, Brook Park, Ohio

F. Miranda
Glenn Research Center, Cleveland, Ohio

C. Cannedy
University of Maryland, College Park, Maryland

The NASA STI Program Office . . . in Profile

Since its founding, NASA has been dedicated to the advancement of aeronautics and space science. The NASA Scientific and Technical Information (STI) Program Office plays a key part in helping NASA maintain this important role.

The NASA STI Program Office is operated by Langley Research Center, the Lead Center for NASA's scientific and technical information. The NASA STI Program Office provides access to the NASA STI Database, the largest collection of aeronautical and space science STI in the world. The Program Office is also NASA's institutional mechanism for disseminating the results of its research and development activities. These results are published by NASA in the NASA STI Report Series, which includes the following report types:

- **TECHNICAL PUBLICATION.** Reports of completed research or a major significant phase of research that present the results of NASA programs and include extensive data or theoretical analysis. Includes compilations of significant scientific and technical data and information deemed to be of continuing reference value. NASA's counterpart of peer-reviewed formal professional papers but has less stringent limitations on manuscript length and extent of graphic presentations.
- **TECHNICAL MEMORANDUM.** Scientific and technical findings that are preliminary or of specialized interest, e.g., quick release reports, working papers, and bibliographies that contain minimal annotation. Does not contain extensive analysis.
- **CONTRACTOR REPORT.** Scientific and technical findings by NASA-sponsored contractors and grantees.

- **CONFERENCE PUBLICATION.** Collected papers from scientific and technical conferences, symposia, seminars, or other meetings sponsored or cosponsored by NASA.
- **SPECIAL PUBLICATION.** Scientific, technical, or historical information from NASA programs, projects, and missions, often concerned with subjects having substantial public interest.
- **TECHNICAL TRANSLATION.** English-language translations of foreign scientific and technical material pertinent to NASA's mission.

Specialized services that complement the STI Program Office's diverse offerings include creating custom thesauri, building customized data bases, organizing and publishing research results . . . even providing videos.

For more information about the NASA STI Program Office, see the following:

- Access the NASA STI Program Home Page at <http://www.sti.nasa.gov>
- E-mail your question via the Internet to help@sti.nasa.gov
- Fax your question to the NASA Access Help Desk at (301) 621-0134
- Telephone the NASA Access Help Desk at (301) 621-0390
- Write to:
NASA Access Help Desk
NASA Center for Aerospace Information
7121 Standard Drive
Hanover, MD 21076



A K-Band Linear Phased Array Antenna Based On $\text{Ba}_{0.60}\text{Sr}_{0.40}\text{TiO}_3$ Thin Film Phase Shifters

R. Romanofsky
Glenn Research Center, Cleveland, Ohio

J. Bernhard
University of Illinois, Urbana, Illinois

G. Washington
Ohio State University, Columbus, Ohio

F. VanKeuls
Ohio Aerospace Institute, Brook Park, Ohio

F. Miranda
Glenn Research Center, Cleveland, Ohio

C. Cannedy
University of Maryland, College Park, Maryland

Prepared for the
International Microwave Symposium 2000
sponsored by the IEEE Microwave Theory and Techniques Society
Boston, Massachusetts, June 11–13, 2000

National Aeronautics and
Space Administration

Glenn Research Center

Trade names or manufacturers' names are used in this report for identification only. This usage does not constitute an official endorsement, either expressed or implied, by the National Aeronautics and Space Administration.

Available from

NASA Center for Aerospace Information
7121 Standard Drive
Hanover, MD 21076
Price Code: A02

National Technical Information Service
5285 Port Royal Road
Springfield, VA 22100
Price Code: A02

A K-BAND LINEAR PHASED ARRAY ANTENNA BASED ON $\text{Ba}_{0.60}\text{Sr}_{0.40}\text{TiO}_3$ THIN FILM PHASE SHIFTERS

R. Romanofsky

National Aeronautics and Space Administration
Glenn Research Center
Cleveland, Ohio

J. Bernhard

University of Illinois
Urbana, Illinois

G. Washington

Ohio State University
Columbus, Ohio

F. VanKeuls

Ohio Aerospace Institute
Brook Park, Ohio

F. Miranda

National Aeronautics and Space Administration
Glenn Research Center
Cleveland, Ohio

C. Cannedy

University of Maryland
College Park, Maryland

ABSTRACT

This paper summarizes the development of a 23.5 GHz linear 16-element scanning phased array antenna based on thin ferroelectric film coupled microstripline phase shifters and microstrip patch radiators.

INTRODUCTION

A prototype scanning 16-element linear phased array using $\text{Ba}_{0.60}\text{Sr}_{0.40}\text{TiO}_3$ films on 0.3 mm thick MgO has been developed. The array is intended to be a steppingstone to collision avoidance radar suitable for automotive applications because of its potential to provide a much lower cost solution for certain Intelligent Vehicle Highway Systems. The phase shifters are based on a series of coupled microstriplines of length l and separation s patterned over pulsed laser deposited $\text{Ba}_{0.60}\text{Sr}_{0.40}\text{TiO}_3$ films nominally 400 nm thick. The maximum coupled voltage occurs when the coupled sections are a quarter wavelength long (i.e., $\beta l = 90^\circ$). Bias up to 400 V is applied to the sections via printed bias-tees consisting of a quarter-wave radial stub in series with a very high impedance quarter-wave microstrip. By concentrating the fields in the odd mode, the phase shift per unit length is maximized and by using the ferroelectric thin film form the effects of high loss tangent are minimized. Selecting the strip spacing s involves a compromise among: minimizing insertion

loss, simplifying lithography, and minimizing the tuning voltage. Strip widths are chosen to approximate a $50\ \Omega$ characteristic impedance. These coupled microstrip devices rival the performance of their semiconductor counterparts at Ku- and K-band frequencies. Typical insertion loss for room temperature ferroelectric 360° phase shifters at K-band is ≈ 5 dB [1-3].

PHASE SHIFTERS

The multilayer phase shifters have been analyzed using a computationally efficient variational method to calculate the even and odd mode capacitance [4,5]. If a quasi-TEM type of propagation is assumed the propagation constant and impedance can be completely determined from line capacitance. Since the cascaded coupled line circuit resembles a series of one-pole bandpass filters, as the dc bias increases, the dielectric constant of the BST film decreases, causing the passband to rise in frequency (and the $\tan \delta$ of the BST to decrease). The impedance matrix of the cascaded network can be derived by well-known coupled line theory using the superposition of even and odd mode excitation. Then an equivalent S-parameter model can be extracted and used to predict the pass-band characteristics of the phase shifter.

The bandwidth compression from tuning is evident in fig. 1 which is data from an 8-section

phase shifter on 0.3 mm MgO using a 400 nm $\text{Ba}_{0.60}\text{Sr}_{0.40}\text{TiO}_3$ laser ablated film. The roll-off at the upper end of the frequency range is attributed to bias-tee effects. The bias tees have a 25 μm wide, 1.83 mm long high impedance line connected to a radial stub with flare angle of 75° and radius 1.17 mm.

PHASE ARRAY DESIGN

The 23.5 GHz array consists of a monolithic 1:16 microstrip beam forming manifold constructed on 0.25 mm thick Duroid 6010, 16 ferroelectric phase shifters patterned on $\approx 1 \times 0.75$ cm MgO substrates, and a monolithic set of microstrip patch radiators patterned on 0.25 mm thick Duroid 5880. Inter-element spacing is 7.49 mm, which corresponds to about 0.57 free-space wavelengths. The layout is shown in fig. 2.

The original manifold, which had each successive branch of the divider networks separated by only 1.3 mm, experienced severe coupling problems resulting in considerable loss and asymmetry between ports. The distance was increased to 4 mm and resulted in a uniform insertion loss of about 13.0 ± 0.25 dB. The patch array was originally fabricated on high dielectric constant material ($\epsilon_r = 10.2$). However, when the resonant frequency of each patch was measured using a HP 8510C automatic network analyzer a large discrepancy was seen between each one. The variation was attributed to dielectric constant tolerances. Indeed substrate tolerances are known to cause serious errors in phased array performance [6]. To circumvent the problem a low dielectric constant homogeneous material was selected. When the array was redesigned on 0.25 mm thick Duroid 5880, the variation in resonant frequency was much smaller, about 5 percent, and the bandwidth was adequate. Figure 3 depicts the measured frequency response. The patch dimensions are: $L = 4.27$ mm, $W = 6.40$ mm, and $\delta = 1.04$ mm. The gap between the feed inset and patch was 0.38 mm. No particular attention was given to reducing sidelobe levels or reducing spurious radiation from the manifold or feed. The measured far-field radiation pattern at boresight is shown in fig. 4. The E-plane corresponds to the elevation direction and the H-plane corresponds to the azimuth direction. The array can scan past 45° before the appearance of a grating lobe.

An electronic module was designed and built to control the array. It consists of 16 independently addressable dc-to-dc converter channels. A model AOB 16/16 analog to digital converter interfaces the controller with a PC. Since the A/D could only source 5 mA per channel, an operational amplifier buffer (OPA547) was inserted between the A/D outputs and Pico Electronics model 12AV500 encapsulated dc-dc converters. A 1 W, 1 M Ω resistor is strapped across the transformers output to prevent a no-load condition. Since the dc input resistance of the phase shifters is $\gg 1$ M Ω , the applied voltage is essentially the programmed voltage. A 0.1 μF capacitor rated at 1 KV provides some filtering. Finally, an LED status indicator on each channel senses whether a thermal overload condition is present. The controller board is shown in fig. 5. It consumes about 25 mA per channel under normal conditions.

CONCLUSIONS

A linear K-band phased array has been demonstrated using novel coupled microstrip thin film ferroelectric phase shifters. The phase shifters capitalize on odd mode propagation to maximize phase tuning and minimize insertion loss. Despite a fairly common misconception that ferroelectric materials have too high a loss tangent for practical microwave applications, these devices can outperform their semiconductor counterparts by several dB. The phased array realized with these phase shifters holds promise to significantly reduce manufacturing costs of phase arrays because the phase shifters are lithographed using a simple two-step process. And the finest feature size is the strip spacing, about 10 μm , compared to perhaps a 0.5 μm gate for a MESFET phase shifter at the same frequency. To the best of our knowledge, this is the first demonstration of a K-band phased array based on ferroelectric films.

REFERENCES

1. F.W. VanKeuls et al., "Room Temperature Thin Film BaSrTiO Ku-Band Coupled Microstrip Phase Shifters: Effects of Film Thickness, Doping, Annealing, and Substrate Choice," IEEE MTT Symp. Digest, (1999) 737.

2. F.W. VanKeuls et al., "YBaCuO,Au/SrTiO/LaAlO Thin Film Conductor/Ferroelectric Coupled Microstripline Phase Shifters for Phased Array Applications", Appl. Phys. Lett., 71 (21) 3075.
3. R. Romanofsky et al., "Analysis and Optimization of Thin Film Ferroelectric Phase Shifters," MRS Symposium Proceedings, Boston MA, December, 1999.
4. R.R. Romanofsky, PhD Thesis, Cleveland State University, 1999.
5. R.R. Romanofsky and A.H. Qureshi, "A Theoretical Model for Thin Film Ferroelectric Coupled Microstripline Phase Shifters," Intermag 2000, Toronto, Canada, April 2000.
6. P. Kabacik, "Design Constraints of Low-Sidelobe Microstrip Phased Arrays," Microwave and Optical Technology Lett., Vol. 17, No. 2, pp. 107–111, Feb., 1998.

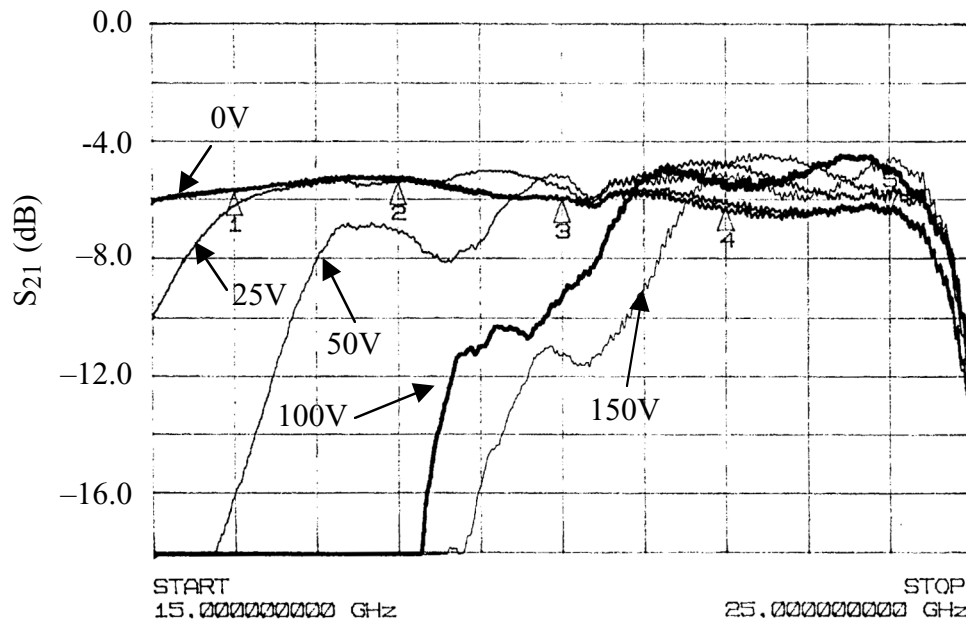


Figure 1.—Measured Insertion Loss (including SMA launchers) of an 8-element $\approx 50 \Omega$ PLD coupled microstripline phase shifter at 290 K as a function of bias voltage. Substrate is 0.3 mm MgO with 400 nm $\text{Ba}_{0.60}\text{Sr}_{0.40}\text{TiO}_3$ film. $l = 350 \mu\text{m}$, $s = 7.5 \mu\text{m}$ and $w = 30 \mu\text{m}$. Bandwidth compression from the filtering effect is evident. Marker 1, 2, 3, and 4 are at -5.75 , -5.38 , -6.00 , and -6.49 dB, respectively.

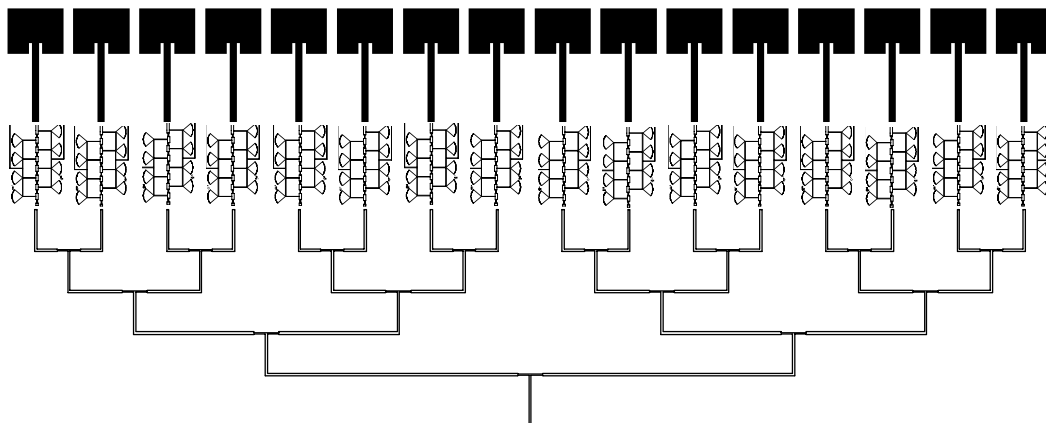


Figure 2.—Layout of the 16 element 23.675 GHz array. The array is 11.9 cm long.

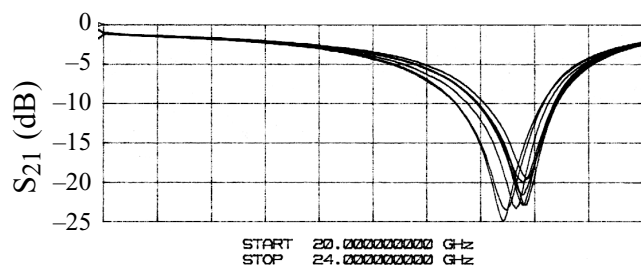


Figure 3.—Measured resonant frequency of patch radiators on 0.25 mm Duroid 5880 ($\epsilon_r = 2.2$), 1 oz. Cu clad material.

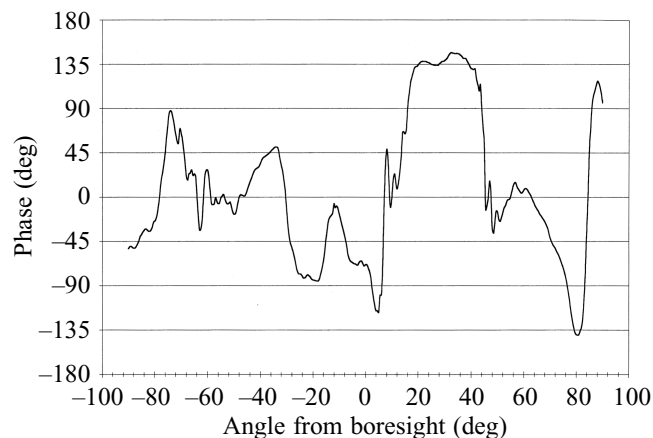


Figure 5.—Measured far-field H-Plane pattern corresponding to a 120 deg incremental phase shift.

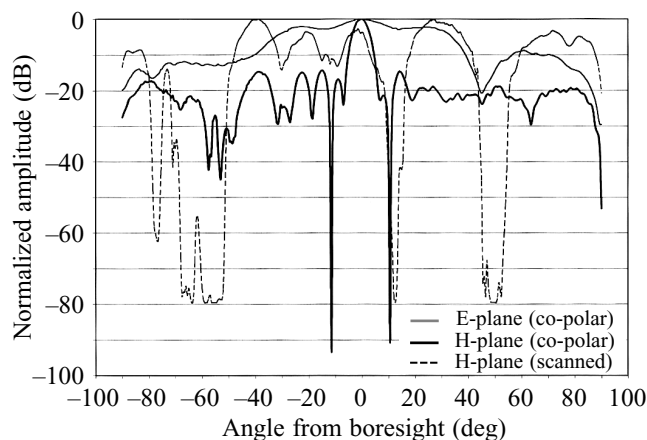


Figure 4.—Measured far-field E-Plane (elevation) and H-Plane (azimuth) pattern of the 16-element ferroelectric phased array at 23.675 GHz, 0 and 120 degree incremental phase shift.

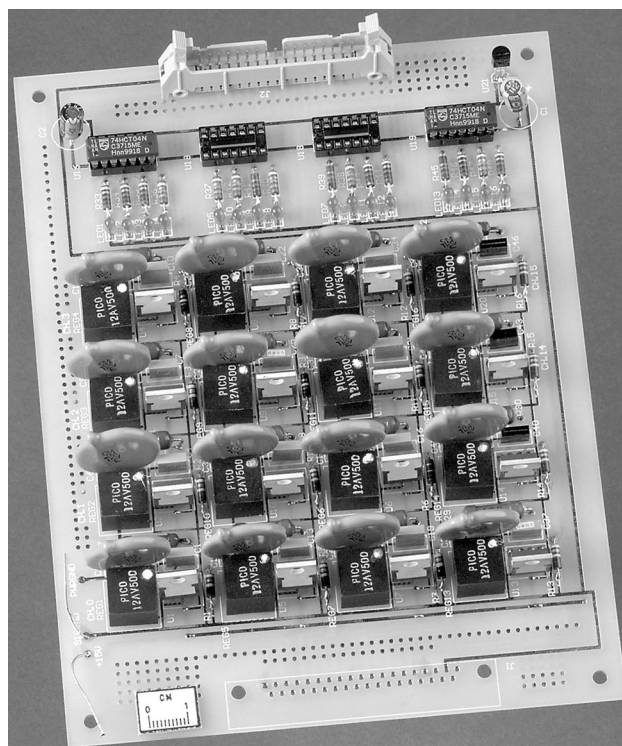


Figure 6.—High voltage controller board for the 16-element phased array. The board measures 19cm \times 14.5 cm. The board accepts a 0-10 V signal from a 16 channel A/D converter and outputs a linear 0-400 V control signal.

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE May 2000	3. REPORT TYPE AND DATES COVERED Technical Memorandum	
4. TITLE AND SUBTITLE A K-Band Linear Phased Array Antenna Based On Ba _{0.60} Sr _{0.40} TiO ₃ Thin Film Phase Shifters			5. FUNDING NUMBERS WU-632-6E-51-00	
6. AUTHOR(S) R. Romanofsky, J. Bernhard, G. Washington, F. VanKeuls, F. Miranda, and C. Cannedy				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration John H. Glenn Research Center at Lewis Field Cleveland, Ohio 44135-3191			8. PERFORMING ORGANIZATION REPORT NUMBER E-12195-1	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration Washington, DC 20546-0001			10. SPONSORING/MONITORING AGENCY REPORT NUMBER NASA TM-2000-210049	
11. SUPPLEMENTARY NOTES Prepared for the International Microwave Symposium 2000 sponsored by the IEEE Microwave Theory and Techniques Society, Boston, Massachusetts, June 11-13, 2000. R. Romanofsky and F. Miranda, NASA Glenn Research Center; J. Bernhard, University of Illinois, Urbana Campus, Urbana, Illinois 61801; G. Washington, Ohio State University, Main Campus, 190 N. Oval Mall, Columbus, Ohio 43219-1321; F. VanKeuls, Ohio Aerospace Institute, 22800 Cedar Point Road, Brook Park, Ohio 44142; C. Cannedy, University of Maryland, College Park, Maryland 20742-0001. Responsible person, R. Romanofsky, organization code 5640, (216) 433-3507.				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Unclassified - Unlimited Subject Categories: 17 and 32 This publication is available from the NASA Center for AeroSpace Information, (301) 621-0390.			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) This paper summarizes the development of a 23.675 GHz linear 16-element scanning phased array antenna based on thin ferroelectric film coupled microstripline phase shifters and microstrip patch radiators.				
14. SUBJECT TERMS Phased array antenna			15. NUMBER OF PAGES 10	
			16. PRICE CODE A02	
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	20. LIMITATION OF ABSTRACT	